



FITTING INSTRUCTIONS FOR


Fuel Filter Guard

SKU

KS0853

COMPATIBILITY

Toyota LandCruiser LC300

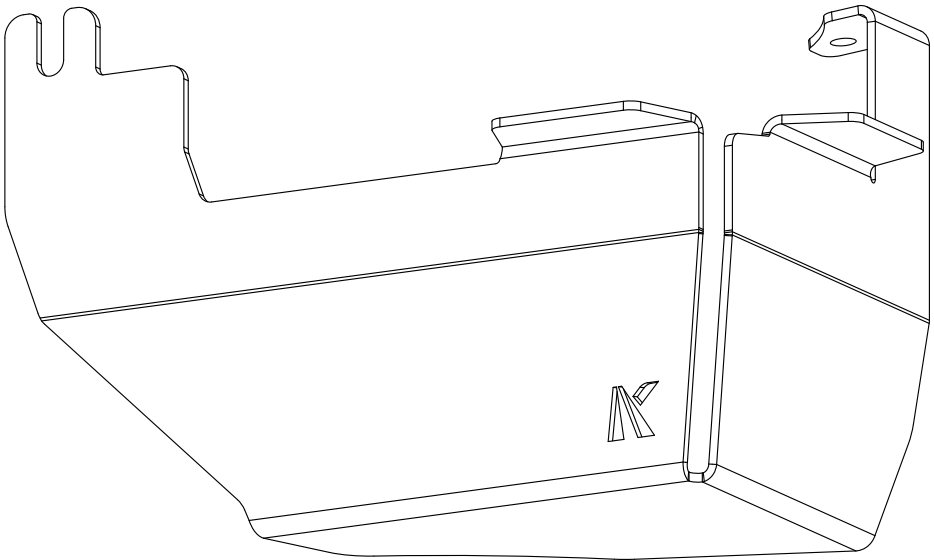

Included contents

QTY	COMPONENT
1	Fuel Filter Guard



Time

5 minutes / Few sips of beer

Scan the **QR code** to watch the video installation guide,
or for further information contact KAON on **07 3180 1470** or info@kaon.com.au



Bolt Torque

DIAMETER (mm)	5mm	6mm	8mm	10mm	12mm
NEWTON-METRES (Nm)	5 Nm	9 Nm	22 Nm	44 Nm	77 Nm

Let's get to work.


Installation

1. We want a nice clean starting surface, so remove any dirt and debris from the mounting surfaces.
2. Loosen, but do not remove, the rear factory bolt connecting the fuel filter to the chassis.
3. Remove the front inner bolt on the fuel filter, and set aside.
4. Slide the guard over the fuel filter in the orientation pictured, positioning it so it is sandwiched between the rear bolt and the chassis.



Installation cont.

5. Replace the factory bolt removed in step 3.
6. Whilst propping up the guard so that it sits flush on the mounting points, tighten all bolts until completely secure.
7. That's it, you're done!
All that's left to do is hit the tracks with peace of mind that your fuel filter is protected.

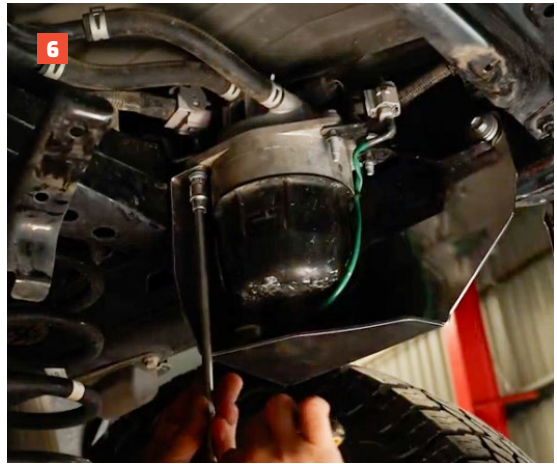



Local Knowledge & Assistance

We know half the fun of building your dream 4x4 is getting your hands dirty. But we also know that sometimes, things don't go to plan. If in the pursuit to build the ultimate setup you find yourself off-track, we're here to help you get unstuck.

For further information call 07 3180 1470 or email info@kaon.com.au

Disclaimer: The products sold by KAON should not be modified, and are for use only on the vehicles specifically stated. KAON will not be liable for any damages arising out of the use or misuse of its products. It is the customers responsibility to ensure the products are safely and properly used and installed. KAON consistently seeks to improve its products and reserves the right to make changes to any product.