
FITTING INSTRUCTIONS FOR

Fire Extinguisher Seat Mount

SKU	VARIANT	COMPATIBILITY
KS0237	***RHS Drivers Side (AU)***	***Toyota Prado 150***

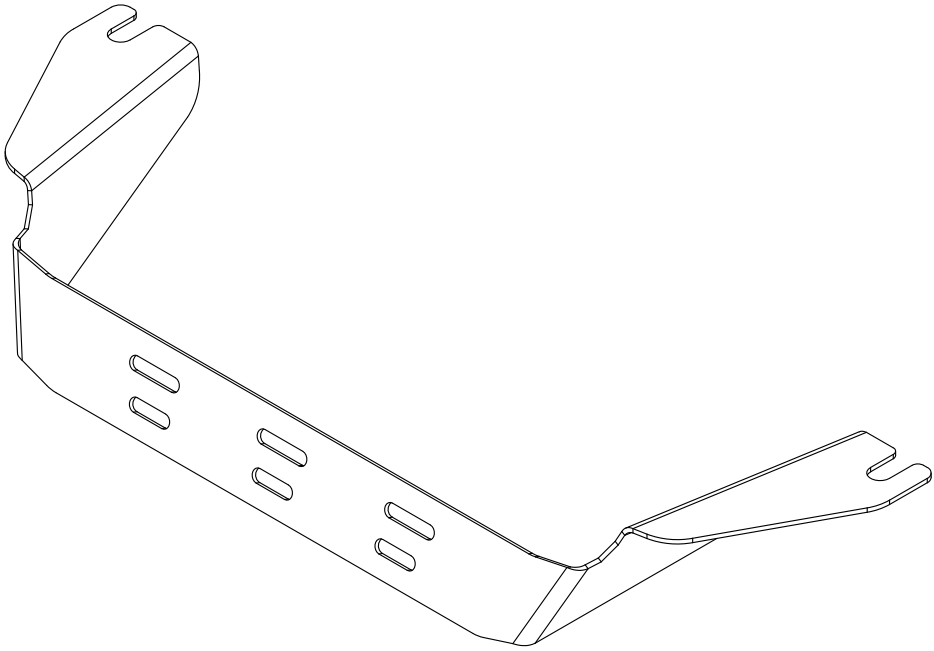

Included contents

QTY	COMPONENT
1	Fire Extinguisher Mount

Time 10 mins / Few swigs of beer

Scan the **QR code** to watch the video installation guide,
or for further information contact KAON on **07 3180 1470** or **info@kaon.com.au**

Let's get to work.

Installation

1. Slide the seat backwards, so it sits in the rear-most position.
2. Unclip the plastic side trim by pushing on the clip prongs underneath with your finger or a screwdriver. There's no need to completedly remove the trim, but this will provide easier access to the nut.
3. Loosen off the front seat nuts, noting that they can be pretty tight! You need a 3-4mm gap, so wind the nuts up to the top but don't undo them completely.








Installation cont.

4. Lift up the seat and slide the bracket between the seat and the rail, one side at a time. You may need a screwdriver to assist with levering it into position. The bracket is correctly installed when it slides all the way into the bolts and sits almost flush with the seat slide mechanism.
5. Once it's in properly, wind back down the nuts and tighten. Clip the trim back in place.
6. Check that the bracket slides with the seat, before mounting the fire extinguisher of your choice – we recommend a 1kg extinguisher.
7. That's it, you're done!



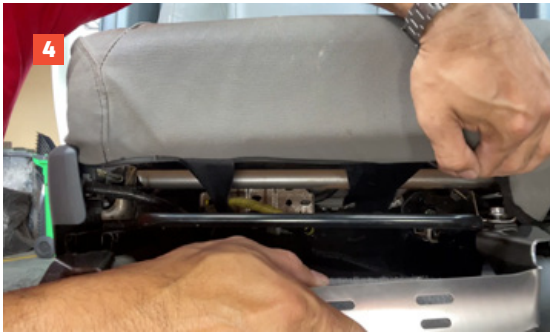





Bolt Torque					
DIAMETER (mm)	5mm	6mm	8mm	10mm	12mm
NEWTON-METRES (Nm)	5 Nm	9 Nm	22 Nm	44 Nm	77 Nm



Local Knowledge & Assistance

We know half the fun of building your dream 4x4 is getting your hands dirty. But we also know that sometimes, things don't go to plan. If in the pursuit to build the ultimate setup you find yourself off-track, we're here to help you get unstuck.


For further information call 07 3180 1470 or email info@kaon.com.au

Disclaimer: The products sold by KAON should not be modified, and are for use only on the vehicles specifically stated. KAON will not be liable for any damages arising out of the use or misuse of it's products. It is the customers responsibility to ensure the products are safely and properly used and installed. KAON consistently seeks to improve it's products and reserves the right to make changes to any product.

FITTING INSTRUCTIONS FOR

Fire Extinguisher Seat Mount

SKU	VARIANT	COMPATIBILITY
KS0539	***LHS Passenger Side (AU)***	***Toyota Prado 150***

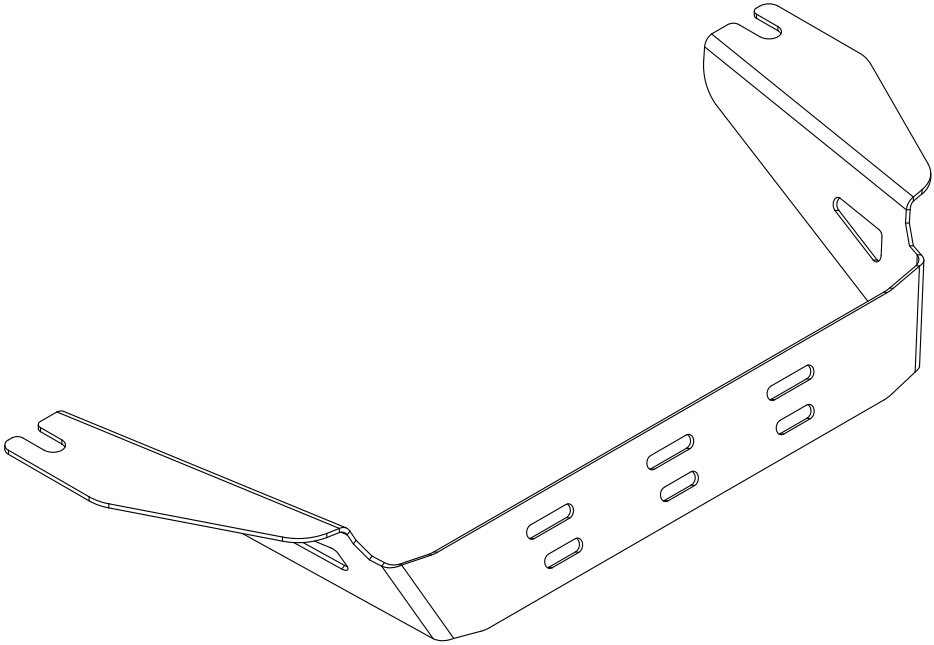

Included contents

QTY	COMPONENT
1	Fire Extinguisher Mount

Time 10 mins / Few swigs of beer

Scan the **QR code** to watch the video installation guide,
or for further information contact KAON on **07 3180 1470** or **info@kaon.com.au**

Let's get to work.

Installation

1. Slide the seat backwards, so it sits in the rear-most position.
2. Loosen off the front seat nuts, noting that they can be pretty tight! You need a 3-4mm gap, so wind the nuts up to the top but don't undo them completely. It can be tricky to get to these on the passenger seat, so if you have one, a ratchet spanner is helpful.







Installation cont.

3. Lift up the seat and slide the bracket between the seat and the rail, one side at a time. You may need a screwdriver to assist with levering it into position. The bracket is correctly installed when it slides all the way into the bolts and sits almost flush with the seat slide mechanism.
4. Once it's in properly, wind back down the nuts and tighten.
5. Check that the bracket slides with the seat, before mounting the fire extinguisher of your choice – we recommend a 1kg extinguisher.
6. That's it, you're done!









Bolt Torque					
DIAMETER (mm)	5mm	6mm	8mm	10mm	12mm
NEWTON-METRES (Nm)	5 Nm	9 Nm	22 Nm	44 Nm	77 Nm



Local Knowledge & Assistance

We know half the fun of building your dream 4x4 is getting your hands dirty. But we also know that sometimes, things don't go to plan. If in the pursuit to build the ultimate setup you find yourself off-track, we're here to help you get unstuck.

For further information call 07 3180 1470 or email info@kaon.com.au

Disclaimer: The products sold by KAON should not be modified, and are for use only on the vehicles specifically stated. KAON will not be liable for any damages arising out of the use or misuse of it's products. It is the customers responsibility to ensure the products are safely and properly used and installed. KAON consistently seeks to improve it's products and reserves the right to make changes to any product.