
FITTING INSTRUCTIONS FOR

Fire Extinguisher Seat Mount

SKU	VARIANT	COMPATIBILITY
KS0855	***RHS Drivers Side (AU)***	***Nissan Patrol GU Y61***

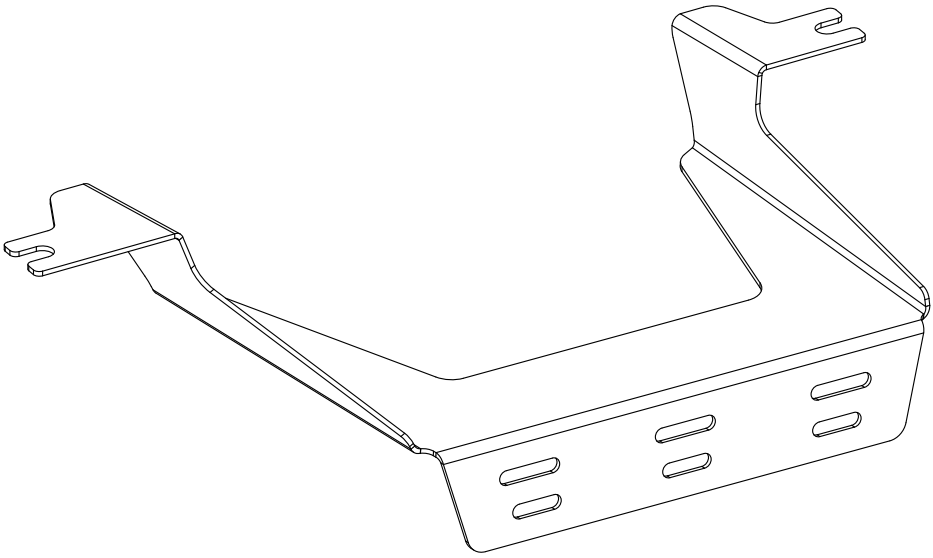

Included contents

QTY	COMPONENT
1	Fire Extinguisher Bracket (LHS)
2	M8 x 20 Hex Bolt
2	M5 x 12 Flanged Hex Bolt G8.8
2	M5 Flanged Nut

Time 30 minutes / Half a beer

For further information contact KAON on **07 3180 1470** or **info@kaon.com.au**


G8.8 Bolt Torque (Non-Lubricated)					
DIAMETER (mm)	5mm	6mm	8mm	10mm	12mm
NEWTON-METRES (Nm)	6 Nm	10 Nm	15 Nm	22 Nm	35 Nm

Let's get to work.

Installation

1. Remove the four factory bolts holding the seat in position, and set aside.
2. Tilt the seat backwards to access the underside of the seat.



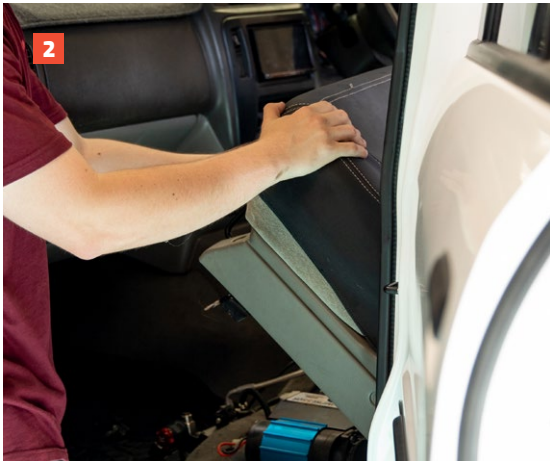


Installation cont.

3. Remove the two M8 bolts at the front of the seat's underside.
4. Place the fire extinguisher bracket in position, with the slotted openings aligned over each hole the factory M8 bolt was just removed from.
5. Secure the bracket using the supplied M8 bolts, and tighten until secure.
6. Check that the bracket slides with the seat, before mounting the fire extinguisher of your choice. We recommend a 1kg extinguisher, and provide M5 bolts and nuts to secure it.
7. Place the seat back in factory position and reattach using the factory bolts. Tighten until secure.
8. That's it – you're done!





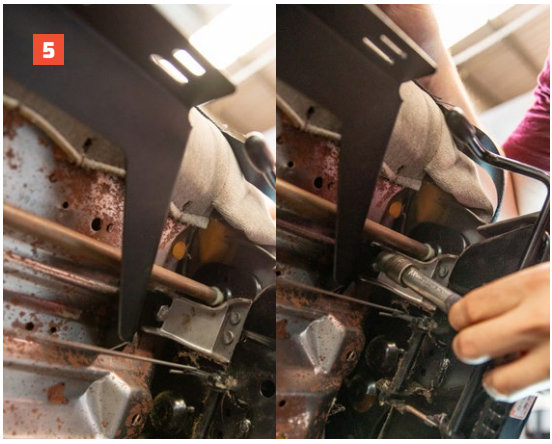



Local Knowledge & Assistance

We know half the fun of building your dream 4x4 is getting your hands dirty. But we also know that sometimes, things don't go to plan. If in the pursuit to build the ultimate setup you find yourself off-track, we're here to help you get unstuck.


For further information call 07 3180 1470 or email info@kaon.com.au

Disclaimer: The products sold by KAON should not be modified, and are for use only on the vehicles specifically stated. KAON will not be liable for any damages arising out of the use or misuse of it's products. It is the customers responsibility to ensure the products are safely and properly used and installed. KAON consistently seeks to improve it's products and reserves the right to make changes to any product.

FITTING INSTRUCTIONS FOR

Fire Extinguisher Seat Mount

SKU	VARIANT	COMPATIBILITY
KS0870	***LHS Passenger Side (AU)***	***Nissan Patrol GU Y61***

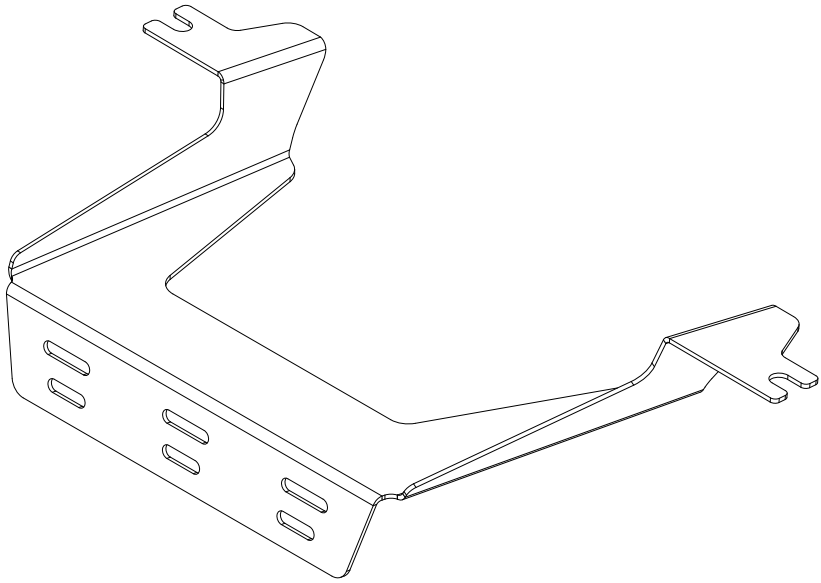

Included contents

QTY	COMPONENT
1	Fire Extinguisher Bracket (LHS)
2	M8 x 20 Hex Bolt
2	M5 x 12 Flanged Hex Bolt G8.8
2	M5 Flanged Nut

Time 30 minutes / Half a beer

For further information contact KAON on **07 3180 1470** or **info@kaon.com.au**

G8.8 Bolt Torque (Non-Lubricated)					
DIAMETER (mm)	5mm	6mm	8mm	10mm	12mm
NEWTON-METRES (Nm)	6 Nm	10 Nm	15 Nm	22 Nm	35 Nm

Let's get to work.

Installation

1. Remove the four factory bolts holding the seat in position, and set aside.
2. Tilt the seat backwards to access the underside of the seat.






Installation cont.

3. Remove the two M8 bolts at the front of the seat's underside.
4. Place the fire extinguisher bracket in position, with the slotted openings aligned over each hole the factory M8 bolt was just removed from.
5. Secure the bracket using the supplied M8 bolts, and tighten until secure.
6. Check that the bracket slides with the seat, before mounting the fire extinguisher of your choice. We recommend a 1kg extinguisher, and provide M5 bolts and nuts to secure it.
7. Place the seat back in factory position and reattach using the factory bolts. Tighten until secure.
8. That's it – you're done!





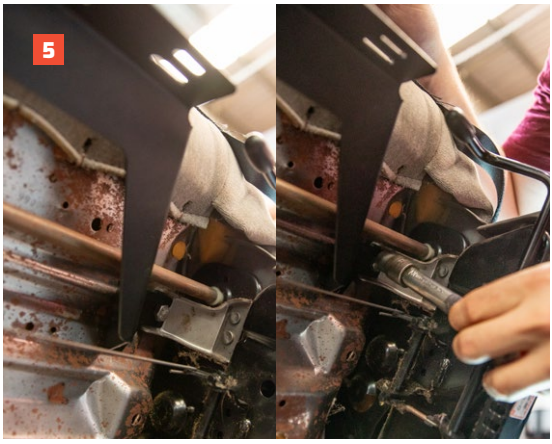



Local Knowledge & Assistance

We know half the fun of building your dream 4x4 is getting your hands dirty. But we also know that sometimes, things don't go to plan. If in the pursuit to build the ultimate setup you find yourself off-track, we're here to help you get unstuck.

For further information call 07 3180 1470 or email info@kaon.com.au

Disclaimer: The products sold by KAON should not be modified, and are for use only on the vehicles specifically stated. KAON will not be liable for any damages arising out of the use or misuse of it's products. It is the customers responsibility to ensure the products are safely and properly used and installed. KAON consistently seeks to improve it's products and reserves the right to make changes to any product.